

WALL INSTALL TEMPLATE

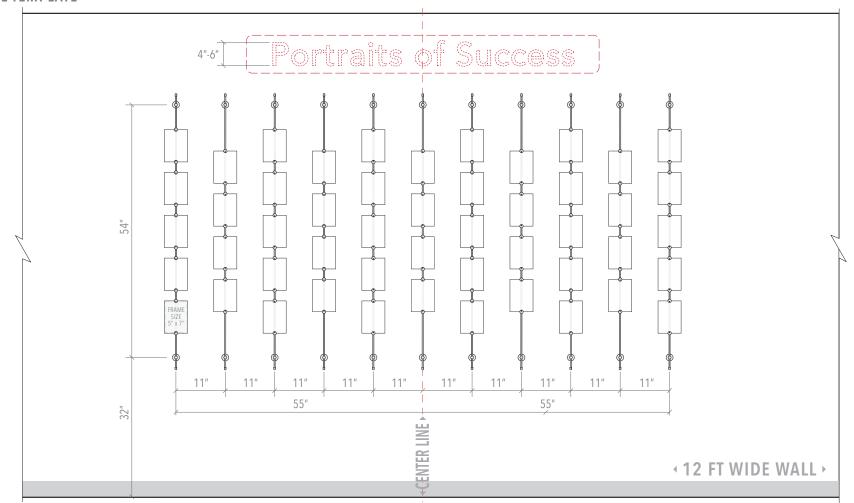


DETAILS:



Acrylic Frames for Photo Inserts / Single-Rod Mount

- **1.** Acrylic frames used with vertical rod system are supplied with "clear" or "non-glare" front. Both back and front panels are a 1/8" thick.
- 2. Use a single 59" long R1500 rod per each column. Rods are mounted onto the wall with WM11 supports. P01 decorative support plates are optional. Add **REC** end caps for rod-end finishing.
- 3. Use RG12 multi-position / adjustable angle supports to mount the acrylic frames to rods in vertical or freestyle angled orientation.
- **4.** Inserts are placed in between the two pieces of acrylic before mounting them to rods.

Note: Non-glare (non-reflective) acrylic front cover helps to reduce the glare and provides a mild protection against harmful UV rays.









Freestyle / Angled Orientation

Nova Display Systems, Inc. 875 Wilson St., Ste. A-B Eugene, OR 97402 541.505.7450 541.505.9919 fax sales@novadisplay.com www.novadisplaysystems.com

Wall Display Concept

ID: DC2136

Title: Photo Wall Display

Display Size: 60"H x 115"W

Wall Size Requirements: 12 FT (144 IN) Wide

Wall Install Template

ID: DC2136-WT

Note: Dimensions on the drawing display hardware mounting points on the wall. These are suggested dimensions and can be slightly modified to accommodate for your own wall specifics.

Note: This drawing is the property of Nova Display Systems and is not to be reproduced or copied in whole or in part. It is only to be used for the project and site specifically identified herein and is not to be used on any other projects, or for the purpose of manufacturing and reproduction. It is to be returned upon request.

Sheet:

Page: 1 of 1 Scale: n/a